

CATALOGUE  
2013

HIGH TECH  
VITRIFIED TILES | 24"x24" | **nano**  
Technology

truly luxurious



AN ISO 9001:2008 CERTIFIED COMPANY





VITRIFIED TILES 24"X24"

Regular Series



Ivory

**nano**



901



903



904




905

**nano**



906

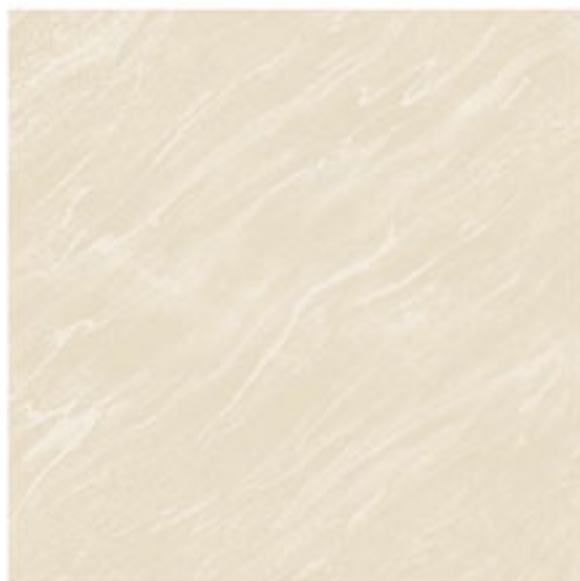

907

**nano**



909



913

600 x 600 mm.



ANTI-FREEZE



SELF-HEALING RESIN



CHEMICAL RESISTANT



BRAKING STRENGTH



ANTI-SLIP



WATERPROOF  
0.05%





914



915

**nano**



916



918

**nano**



919

**nano**



922

**nano**



923

**nano**



924

**nano**



925

600 x 600 mm.



ANTI-FROST



SLIP RESISTANCE



SOUND ABSORPTION



BREAKING STRENGTH



ANTI-SLIP



WATER ABSORPTION  
0.0%





VITRIFIED TILES 24"X24"

Regular Series



927

NANO



929

NANO



930

NANO



931

NANO



932

NANO



600 x 600 mm.



ANTI-FROST



ANTI-SCRATCH



ANTI-IMPACT



ANTI-WEAR




ANTI-SLIP





Exclusive Series

---



Super White



Black

S.P. Series

---



Terracotta

S.S.P. Series

---



Jaisalmer



**Vitrified Tiles 600 x 600 mm**

Sr. No.	Characteristics	Standard as per ISO13006 / EN 176 Group Bla	Coral Vitrified value	Test Method
1.	Deviation in Length & Widht	± 0.6%	± 0.1%	EN98
2.	Deviation in Thickness	± 0.5%	± 0.1%	EN 98
3.	Straightness of Side	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness (Curvature & Warpage)	± 0.5%	± 0.2%	EN 98
6.	Water Absorption	± 0.5%	± 0.05%	EN 99
7.	Moh's Hardness	> 6	> 8	EN 101
8.	Flexural Straingthness	> 27 N/mm <sup>2</sup>	> 47 N/mm <sup>2</sup>	EN 100
9.	Abrasion Resistance	< 204 mm <sup>3</sup>	< 144 mm <sup>3</sup>	EN 102
10.	Skid Resistance (Friction Co-efficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	>2	2.4	DIN 51082
13.	Frost Resistance	Frost Proof	Frost Proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Moisture Resistance	Nil	Nil	ISO 10545-10
17.	Glossiness	-	Min 65% - 70% Reflection	Glossmeter

**PACKAGING DETAILS**

Nominal Size	No. of Tiles	Coverage Area /Box (Approx.)	Coverage Area /Box (Approx.)
600 x 600 mm.	4 Pcs. / Box	15.50 Sq. Ft.	1.440 Sq. Mtr.

Note : Colours Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.

**APPLICATIONS****CORAL GRANITO PVT. LTD.**

8-A, National Highway, Old Rafeleshwar Road, B/h Lalpar Village, MORBI - 363 642 (Guj.) INDIA.  
Tele .: +91-2822- 326 999, Fax : +91-11-43850155, E-mail : info@coralgranito.com  
Web. : www.coralgranito.com